



**FINITOOLS** EN

**cibo**  
time saving abrasives



## Smooth through the curve with powerful pipe sander

Whatever type of tube or cylinder you have to finish, achieving a uniform finish is a difficult task. That is unless you have the Finitube pipe sander - an innovative and ingeniously designed belt sander that makes easy work of finishing stainless steel tubes and cylinder constructions. Sanding, grinding and polishing, this pipe sander does it all, and with the greatest ease.

### FINITUBE

code	voltage	power	m/s
SMFTNB	110V	1,700W	2,5-9





### SMOOTH OPERATION

The direct connection of the arm to the drive motor is unique. This results in smooth, comfortable operation.



### STABLE BELT ALIGNMENT

Flanges on the guide wheels ensure exceptionally flexible and stable belt alignment. This makes it almost impossible for the sanding belt to run off the machine.



### EASY TO USE

Thanks to the shape and clever position of the handball, all tube types can be clamped perfectly.




### MAXIMUM PRODUCTIVITY

Maximum productivity thanks to the powerful 1700-Watt motor and robust planetary gear. Power is transmitted by an almost indestructible multi V-belt.



### NO DAMAGE

The bumper function prevents the guide wheel from making contact with the work piece, which ensures damage to the machine can be avoided.




### 270° RANGE

An easily achievable range of 270° with most common tube diameters, and even up to 360° by making an extra hand movement.







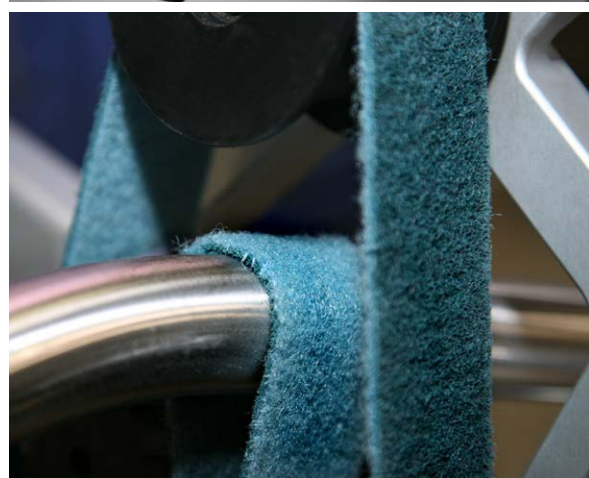




### SAFETY ASSET

Thanks to the foot being made from impact-resistant plastic, the machine can be placed down safely. This benefits ease of use and safety.



**FINITUBE SET**

	<i>code</i>	<i>description</i>	<i>number</i>
	<b>SMFTNA/D</b>	Finitube machine	1
	<b>VT/RC1/675X40</b>	Surface conditioning belt 1-1/2" x 26-1/2" RC1-Coarse	1
	<b>VT/RC2/675X40</b>	Surface conditioning belt 1-1/2" x 26-1/2" RC2-Medium	2
	<b>VT/RC3/675X40</b>	Surface conditioning belt 1-1/2" x 26-1/2" RC3-Fine	1
	<b>FF87/120/675X40</b>	Abrasive belt 1-1/2" x 26-1/2" grit type 120	2
	<b>FF87/240/675X40</b>	Abrasive belt 1-1/2" x 26-1/2" grit type 220	2
	<b>FF87/320/675X40</b>	Abrasive belt 1-1/2" x 26-1/2" grit type 320	2
	<b>237AA/30/675X40</b>	Trizact™belt 1-1/2" x 26-1/2" grit type A30 (= grit type P600)	1
	<b>237AA/45/675X40</b>	Trizact™belt 1-1/2" x 26-1/2" grit type A45 (= grit type P400)	1
	<b>T/AVFSOFT/170158</b>	Tex sheet 6-3/4" x 6-1/4" Avf Soft-Very fine	4
	<b>T/SUF1000/170158</b>	Tex sheet 6-3/4" x 6-1/4" SUF 1,000-Ultra fine	4
	<b>FORU/60</b>	Rubber-bonded sanding block grit type 60	1
	<b>SPIC</b>	Inoxiclean spray can	1

Trizact™ is a registered trademark of the 3M Company.

# *original*<sup>®</sup> **Finit-All**

## **Finishing stainless steel was never so easy**

The Finit-All is the perfect tool for those who are unfamiliar with stainless steel or who only work on it occasionally. With its flat drive and 6" protective cover, this machine is made for our Combi unitised finishing disc. However, the Finit-All is more than just a pure finishing machine, it is a real all-rounder. With a speed range of 2000 - 7600 RPM, the Finit-All can be used for both finishing and (light) grinding work. For the latter, you can rely on the Ø 6" zirconium flap disc.

### FINIT-ALL

<i>code</i>	<i>voltage</i>	<i>power</i>	<i>RPM</i>
<b>SMFASET*</b>	<b>110 V</b>	<b>1000 W</b>	<b>2000 - 7600</b>

\* The engine is sold as a set only.





45°

### ANGLES UP TO 45°

Thanks to the extremely flat drive head, even sharp angles and hard-to-reach areas up to 45° can be finished easily and quickly.



### SAFETY

Air inlets protect the motor against overheating. The electronic soft-start also contributes to safety in addition to the restart protection (which prevents automatic restart after a power failure).



### PERFECT MATCH WITH COMBI UNITISED

In addition to the drive, the 6" protective cover ensures a perfect match with Combi unitised discs, which allow you to quickly and easily remove the weld seam in an inside corner and finish it to perfection.



### PERFECT ERGONOMICS

The slim handle and short motor ensure great ease of use.

### LONG SERVICE LIFE

Motor with auto-stop carbon brushes and patented dust protection for long service life.

### EASY DISC CHANGE

Spindle shaft blocking for fast accessory replacement (which cannot be pressed in accidentally).





**FINIT-ALL SET**

	<i>code</i>	<i>description</i>	<i>number</i>
	<b>SMFASET*</b>	Finit-All machine	1
	<b>GA7T31</b>	Rebel One Combi Ø 6" x 1/4" x 1" G-line - dens.7	1
	<b>RCD/ME/125</b>	Rapid Combi Disc Ø 5" x 22 Medium	1
	<b>SAG/5/125</b>	Rebel One disc on fibre glass Ø 5" x 3/4" S-Line - dens.5	1
	<b>FORU/60</b>	Rubber-bonded sanding block #60	1
	<b>FMGRT/AF/60040</b>	Tex open belt 23-1/2" x 1-1/2" AF	1
	<b>FNC/60/150</b>	Cloth flaps disc on glass fibre backing Ø 6" x 3/4" - #60	1

\* The engine is sold as a set only.

# *original* **Finit-Easy**

<i>code</i>	<i>voltage</i>	<i>power</i>	<i>RPM</i>
SMFEFB	110 V	1,700 W	1,000 - 4,300

## **No corner is safe for this inner corner grinder**

One of the biggest issues in the world of abrasives is accessibility. The Finit-Easy solves the issue by giving you the freedom of movement that you need to achieve a professional finish in hard-to-reach places or corners. Finishing inside corners and removing welds is child's play thanks to the innovative extension arm of this inner corner grinder. The application area is very wide, and is suitable for light finishing work to heavier machining. Ideal in combination with the Rebel One unitised, 3D abrasive material that always ensures a uniform finish, which means it can be completely used up.

## **Hoe kan ik deze langer maken???**

FINIT-EASY

<i>code</i>	<i>voltage</i>	<i>power</i>	<i>RPM</i>
SMFEMB/	110 V	1000 W	2000 - 7600





### **OPTIMAL ACCESSIBILITY**

The adjustable protective cover and compact end ensure optimum accessibility. At 1", this is the narrowest arm on the market; even sharp 30° inside corners can be finished.



### **MULTI-UTILISATION**

Smart stainless steel flanges ensure effortless installation of all types of discs with different shaft diameters and thicknesses.

### **STAINLESS STEEL-SAFE**

The machine is completely stainless steel safe, which means there will be no contamination if a part makes contact with the stainless steel work piece.



### **MAXIMUM PRODUCTIVITY**

Maximum productivity thanks to the powerful 1700-Watt motor and robust planetary gear. Power is transmitted by an almost indestructible multi V-belt.


















### **SMOOTH OPERATION**

The direct connection of the arm to the drive motor is unique. This results in smooth, comfortable operation.



**FINIT-EASY SET**

	code	description	number	
			SMFEBA	SMFEFA
	<b>SMFEMB/W</b>	Finit-Easy machine	1	1
	<b>SV19030</b>	Abrasive file 7-1/2" x 1-1/4"	1	1
	<b>706GR/24/V006</b>	Grip sheet 7-1/2" x 1-1/4" # 24 SP706	6	6
	<b>FA3T32</b>	Rebel One Ø 6" x 1/4" x 1" F-line - dens.3	-	1
	<b>FA5T32</b>	Rebel One Ø 6" x 1/4" x 1" F-line - dens.5	-	1
	<b>SA5T31</b>	Rebel One Ø 6" x 1/4" x 1" S-line - dens.5	1	1
	<b>SA6T31</b>	Rebel One Ø 6" x 1/4" x 1" S-line - dens.6	1	1
	<b>SA7T30</b>	Rebel One Ø 6" x 1/4" x 1" S-line - dens.7	1	1
	<b>MA8T30</b>	Rebel One Ø 6" x 1/8" x 1" M-line - dens.8	1	1
	<b>TA10T30</b>	Rebel One Ø 6" x 1/8" x 1" T-line - dens.10	-	1
	<b>GA7T31</b>	Rebel One Combi Ø 6" x 1/4" x 1" G-line - dens.7	1	1
	<b>GA8T31</b>	Rebel One Combi Ø 6" x 1/4" x 1" G-line - dens.8	-	1
	<b>SAG/5/125</b>	Rebel One disc on fibre glass Ø 4-1/2" x 7/8" S-Line - dens.5	1	1
	<b>RCD/ME/125</b>	Rapid Combi Disc Ø 4-1/2" x 7/8" Medium	1	1
	<b>MHV5600/T31</b>	Felt disc Ø 6" x 1/4" x	1	1
	<b>PV102</b>	High gloss polishing paste - pink	1	1
	<b>FMGRT/AF/60040</b>	Tex open belt 23-1/2" x 1-1/2" AF	1	2
	<b>FORU/60</b>	Rubber-bonded sanding block #60	-	1
	<b>SPIC</b>	Inoxiclean spray can	-	1
	<b>SMFE/A1010/A/13mm</b>	Nut flange Ø1-3/4" x 5/8 Finit-Easy - raised	-	1

# Finimaster<sup>original</sup>

## Satinising machine for larger sanding wheels

Do you require the use of larger sanding wheels for brushing, roughening, cleaning or polishing? Or do you impose higher demands on accessibility through the shape of the work piece being worked? Then the Finimaster Pro is your ideal partner to create almost any desired structure from any position.

### FINIMASTER PRO

<i>code</i>	<i>voltage</i>	<i>power</i>	<i>description</i>	<i>RPM</i>
FMCIPRS1/110	110 V	1,700 W	Finimaster pro set 1 (110V)	700 - 3,000
FMCIPRS2/110	110 V	1,700 W	Finimaster pro set 2 (110V)	700 - 3,000





### **STABLE AND COOL OPERATION**

Stable and cool operation thanks to the large diameter of the wheels.



### **SIMPLE WHEEL CHANGE**

5/8"-M attachment system for quick wheel change.



### **IMPROVED ACCESSIBILITY**

The easily rotated protective cover provides improved accessibility and perfect control of the working pressure in almost every conceivable position.

















### **INCREASED VOLUME**

With wheels of 4-3/4" x 4-1/2", 60% more abrasive material volume compared to wheels of 4" x 4" mm.





**FINIMASTER PRO SET**
**Finimaster** original®

	<i>code</i>	<i>description</i>	number	
			FMCIPRS1	FMCIPRS2
	<b>FMCI/110/W</b>	Finimaster Pro machine	1	1
	<b>FMTW/80/120110</b>	Finimaster Tex wheel Ø 4-3/4" x 4-1/2" #80	1	1
	<b>FMCW/80/120110</b>	Finimaster Combi wheel Ø 4-3/4" x 4-1/2" #80	-	1
	<b>FMSBM1/W</b>	Drive wheel for abrasive belts	1	1
	<b>FMNUM/W</b>	Finimaster inflatable wheel Ø 4-3/4" x 4" x 5/8"-11	1	1
	<b>VT/FE1/395x100</b>	Surface conditioning sleeve Ø 4-3/4" x 4" Coarse	1	1
	<b>VT/FE2/395x100</b>	Surface conditioning sleeve Ø 4-3/4" x 4" Medium	2	2
	<b>VT/FE3/395x100</b>	Surface conditioning sleeve Ø 4-3/4" x 4" Very Fine	1	1
	<b>FX87/40/385x100</b>	Abrasive sleeve Ø 4-3/4" x 4" #40	1	1
	<b>FX87/80/385x100</b>	Abrasive sleeve Ø 4-3/4" x 4" #80	1	1
	<b>FX87/120/385x100</b>	Abrasive sleeve Ø 4-3/4" x 4" #120	1	1
	<b>337DC/300/385x100</b>	Abrasive sleeve Ø 4-3/4" x 4" Trizact 337DC A300	2	2
	<b>FF87/80/675X40</b>	Abrasive belt 1-1/2" x 26-1/2" FF87 #80	1	1
	<b>FF87/120/675X40</b>	Abrasive belt 1-1/2" x 26-1/2" FF87 #120	1	1
	<b>FMGRT/AF/60040</b>	Tex open belt 1-1/2" x 23-1/2" AF	2	2
	<b>FMGRT/SUF/60040</b>	Tex open belt 1-1/2" x 23-1/2" SUF	2	2
	<b>FMGRSL50030</b>	Grip lock (velcro fastner) 1-1/4" x 20"	1	1
	<b>SPIC</b>	Inoxiclean spray can	-	1
	<b>FORU/60</b>	Rubber-bonded sanding block #60	-	1
	<b>MHIT</b>	Inoxitape	-	1
				

# Finipower<sup>original</sup>

# Finipower<sup>original</sup>+

## Angle grinder for polishing work

Are you looking for a powerful angle grinder for all your polishing work? Then choose this slow-running Finipower.

## The all-rounder among the machines

The Finipower Plus is the all-rounder among the machines. Given its wide rpm range, this angle grinder is ideal for all your sanding and grinding work. It can be used in combination with our Rebel One unitised range, our flap discs, and our RCD finishing discs.

### FINIPOWER

specifications	SMFP/110/W
<b>For discs of up to max.</b>	5"
<b>Voltage</b>	110 V*
<b>Power consumption</b>	1,700 W
<b>Power output</b>	1,070 W
<b>Zero load rpm</b>	700 - 3,000 rpm
<b>Screw thread shaft</b>	5/6"-11
<b>Cable length</b>	10 feet

### FINIPOWER PLUS

specifications	SMMS6B/W
<b>For discs of up to max.</b>	6"*
<b>Voltage</b>	120 V, 50/60Hz
<b>Power consumption</b>	1340 W
<b>Power output</b>	800 W
<b>Zero load rpm</b>	2,000 - 7,600 rpm
<b>Screw thread shaft</b>	5/8"-11
<b>Cable length</b>	16 feet

\* Protective cover included as standard for discs with diameters of 4 1/2" and 5". Protective cover for discs with a diameter of 6" is available separately.





### **SMOOTH DISC CHANGE**

Spindle shaft blocking for a smooth disc change.



original<sup>®</sup>  
**Finipower**

### **SAFETY ASSET**

The air inlets protect the motor against overheating. The soft-start motor also contributes to safety in addition to the restart protection (which prevents automatic restart after a power failure).




### **MULTI-UTILISATION**

Seamlessly adjustable rpm makes the machine suitable for both sanding and polishing.



### **MAXIMUM PRODUCTIVITY**

Maximum productivity thanks to the powerful 1,700-Watt motor and robust planetary gear. VTC electronics guarantees constant rpm under any load.

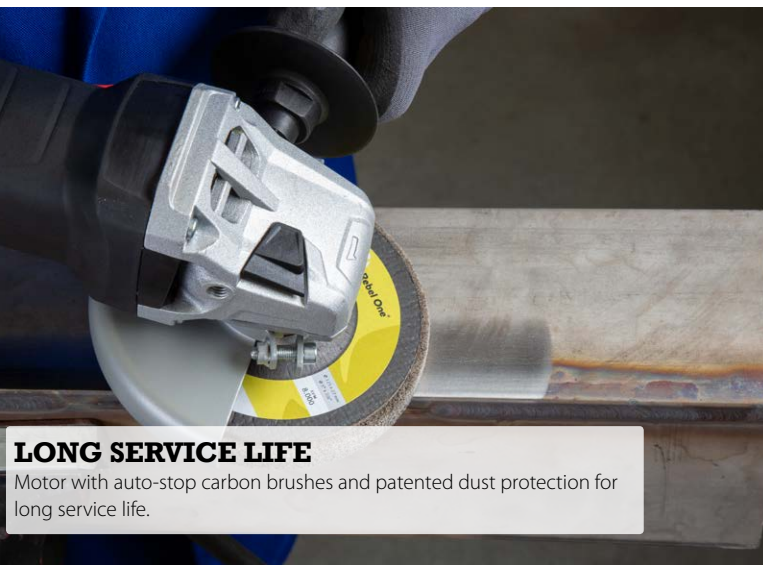

### **LONG SERVICE LIFE**

Motor with auto-stop carbon brushes and patented dust protection for long service life.



### **PERFECT ERGONOMICS**

Slim grip ensures optimal guidance and operation without getting tired.

original<sup>®</sup>  
**Finipower<sup>+</sup>**

### **MULTI-UTILISATION**

Seamlessly adjustable rpm makes the machine suitable for both sanding and polishing.

### **LONG SERVICE LIFE**

Motor with auto-stop carbon brushes and patented dust protection for long service life.

### **SMOOTH DISC CHANGE**

Spindle shaft blocking for a smooth disc change.

### **MAXIMUM PRODUCTIVITY**

Maximum productivity due to strong 1,530-Watt motor. VTC electronics guarantees constant rpm under any load.

### **SAFETY ASSET**

Thermal safety, extremely soft-start motor and restart protection.

**YOUR DISTRIBUTOR**

**INTERESTING?  
DISCOVER THE WHOLE RANGE:  
WWW.CIBO.BE**

Deugenietstraat 5 - 3150 Tildonk - Belgium  
T +32 61 85 85 - F +32 61 84 84  
www.cibo.be

**cibo**  
time saving abrasives